

# Product Specifications

## Beta® 57A Supercardioid Dynamic Instrument Microphone

### Overview

The Shure Beta 57A is a precision-engineered dynamic microphone designed for professional live sound reinforcement and studio recording. A tight supercardioid pattern delivers high gain before feedback and maximum isolation from other sound sources, with minimum off-axis tone coloration.

### Features

- Premier live performance microphone with Shure quality, ruggedness, and reliability
- Uniform supercardioid pick-up pattern for maximum gain before feedback and superior rejection of off-axis sound
- Tailored frequency response specifically shaped for guitars, drums and vocals
- Neodymium magnet for greater sensitivity and higher output
- Advanced pneumatic shock mount system that minimizes transmission of mechanical noise and vibration
- Dent-resistant steel mesh grille and enamel coated die-cast metal construction resist wear and abuse

### Available Models

<b>Beta 57A</b>	Supercardioid Dynamic Instrument Microphone with High-output Neodymium Element
-----------------	--

### Specifications

Cartridge Type	Dynamic (moving coil)
Frequency Response	50 to 16,000 Hz
Polar Pattern	Supercardioid
Output Impedance	150 Ω
Sensitivity (at 1kHz, open circuit voltage)	-51 dBV/Pa (2.8 mV) 1 Pascal=94 dB SPL
Weight	Net: 0.275 kg (0.6 lbs)
Connector	Three-pin professional audio (XLR), male




Beta 57A


### Accessories and Replacement Parts

<b>RK320</b>	Replacement grille	<b>R174</b>	Replacement cartridge
<b>A57AWS</b>	Locking microphone windscreen	<b>A25D</b>	Microphone clip

### Polar Pattern

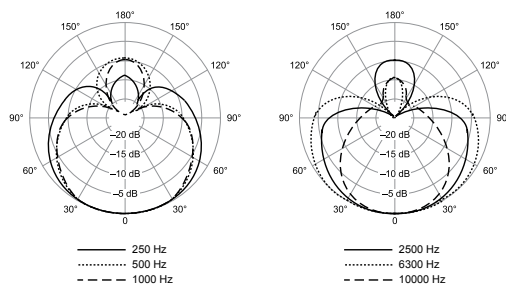

### Frequency Response

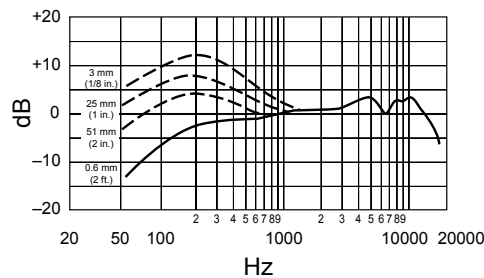

**SHURE**®

LEGENDARY  
PERFORMANCE™

www.shure.com

©2015 Shure Incorporated